DELABIE

TEMPOFLUX urinal valve

Ref. 778757

Time flow 3 seconds. For DELABIE DELTA urinal



DESCRIPTION

TEMPOFLUX urinal valve - Ref.778757

Exposed time flow urinal valve:
For DELABIE DELTA urinal
Soft-touch operation.
Time flow pre-set at ~3 seconds.
Flow rate pre-set at 0.15 L/sec at 3 bar, can be adjusted up to 0.3 L/sec.
Innovative stopcock and flow rate adjustment system integrated in the wall plate (patent).
Complies with the European standard EN 12541 (class II accoustic level).
Chrome-plated solid brass body M½".
With chrome-plated neck tube.
Angled for recessed inlet.
Suitable for people with reduced mobility.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- ECO time flow 3 seconds
- Soft-touch operation
- Integrated stopcock inside wall plate
- Sleek and slim design

TECHNICAL CHARACTERISTICS

TEMPOFLUX urinal valve - Ref.778757

Technology	Time flow
Height	330 mm
Flow rate	0.15 l/sec
Connector	1/2"

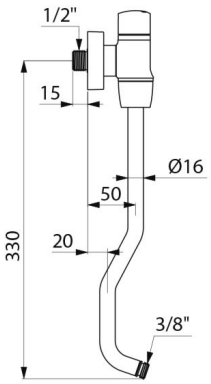

© Delabie