DELABIE

SECURITHERM BIOCLIP thermostatic sink mixer



Ref. H9615

Pillar-mounted thermostatic sequential mixer

DESCRIPTION

SECURITHERM BIOCLIP thermostatic sink mixer - Ref.H9615


Pillar-mounted thermostatic SECURITHERM sink mixer.
Mixer with removable BIOCLIP spout supplied with 2 stainless steel spouts.
Thermostatic sequential mixer: opens and closes with cold water.
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
No risk of cross flow between hot and cold water.
No non-return valves on the inlets.
Scale-resistant thermostatic sequential cartridge for sequential control of flow rate and temperature.
Temperature can be adjusted from cold water up to 40°C with maximum temperature limiter set at 40°C.
Thermal and chemical shocks are possible.
Body and spout with smooth interiors and low water volume.
Flow rate regulated at 7 lpm.
Chrome-plated brass body.
No manual contact thanks to Hygiene control lever L. 146mm.
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
10-year warranty.

ADVANTAGES

TECHNICAL CHARACTERISTICS

SECURITHERM BIOCLIP thermostatic sink mixer - Ref.H9615

Technology	SECURITHERM BIOCLIP sequential, Securitouch
Height	258 mm
Flow rate	7 lpm
Connector	M1/2"
Finish	Chrome-plated brass
Spout Length	136 mm
Temperature limiter	40 °C

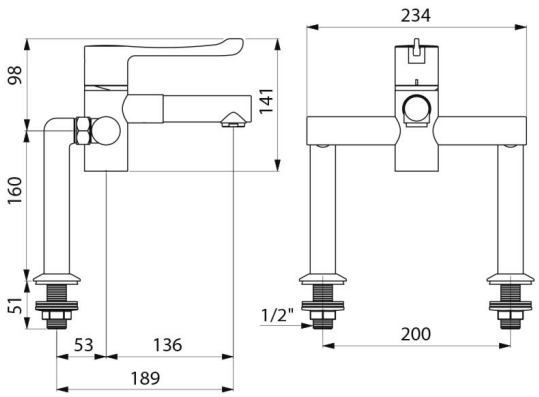

© Delabie