
DELABIE

BINOPTIC MIX electronic mixer

Ref. 379MCH

Mains supply

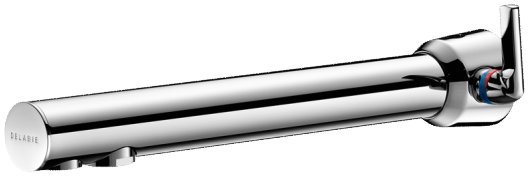

DESCRIPTION

BINOPTIC MIX electronic mixer - Ref.379MCH

Cross wall electronic basin mixer:
Independent IP65 electronic control unit.
230/12V mains supply with transformer.
Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 to 6 lpm.
Scale-resistant flow straightener.
Adjustable duty flush (pre-set flush ~60 seconds every 24 hours after last use).
Active, infrared presence detection, sensor at the end of the spout optimises detection.
Filters and solenoid valves M3/8".
Chrome-plated brass body.
Chrome-plated spout for cross wall installation ?110mm
Cable for sensor L. 120mm, flexibles and mounting all pass through the same hole.
Anti-blocking safety.
Spout with smooth interior and low volume of water (reduces bacterial niches).
Side temperature control with standard lever and adjustable maximum temperature limiter.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- 90% water savings
- Total hygiene: no manual contact
- Increased resistance: chrome-plated brass spout
- Independent IP65 electronic control unit

TECHNICAL CHARACTERISTICS

BINOPTIC MIX electronic mixer - Ref.379MCH

Technology	Electronic
Flow rate	3 lpm
Connector	M3/8"
Supply	230/12V mains supply
Spout Length	230 mm
Installation:	Cross wall

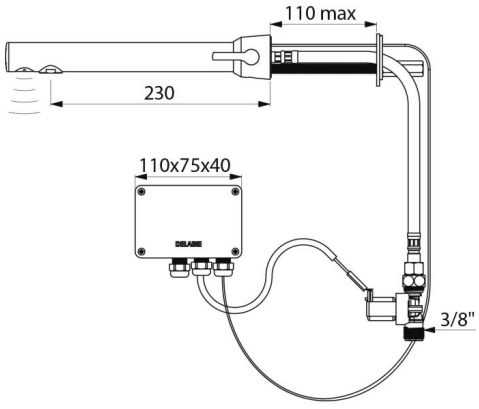

© Delabie