DELABIE

SECURITHERM BIOCLIP thermostatic sink mixer

Ref. H9611

Wall-mounted sequential thermostatic mixer



DESCRIPTION

SECURITHERM BIOCLIP thermostatic sink mixer - Ref.H9611

Wall-mounted thermostatic sink mixer with removable BIOCLIP spout.
Mixer supplied with 2 removable stainless steel spouts L.136mm.
Sequential thermostatic mixer: opens and closes with cold water.
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
No risk of cross flow between hot and cold water.
No non-return valves on the inlets.
Scale-resistant sequential thermostatic cartridge for sequential control of flow and temperature.
Temperature control: cold water up to 40°C, with temperature limiter set at 40°C.
Thermal and chemical shocks are possible.
Body and spout with smooth interiors and low water volume.
Flow rate regulated at 7 lpm.
Chrome-plated brass body.
No manual contact thanks to Hygiene control lever L. 146mm.
Mixer with 150mm centres supplied with offset STOP/CHECK connectors M1/2" M3/4" ideal for hospitals.
Mixer ideal for healthcare facilities, retirement homes, hospitals and clinics.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

© Delabie

TECHNICAL CHARACTERISTICS

SECURITHERM BIOCLIP thermostatic sink mixer - Ref.H9611

Technology	SECURITHERM BIOCLIP sequential Securitouch
Flow rate	7 lpm
Connector	M1/2"
Finish	Chrome-plated brass
Spout Length	136 mm
Temperature limiter	40 °C
Depth	201 mm

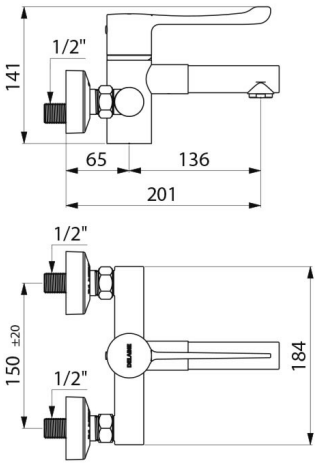

© Delabie