DELABIE

Sequential mechanical basin mixer



Ref. 2641S

Sequential mechanical mixer with fixed spout L. 200mm

DESCRIPTION

Sequential mechanical basin mixer - Ref.2641S


Wall-mounted sequential mechanical basin mixer.
Opens and closes on cold water, with 70° turning range.
Flat, swivelling under spout L. 200mm with hygienic BIOSAFE outlet.
Spout can be easily fixed in place.
Securitouch thermal insulation prevents burns.
Ø 35mm ceramic cartridge.
Pre-set maximum temperature limiter.
Body and spout with narrow tubes with smooth interiors and very low water volume.
The speed of the water prevents the development of biofilm.
Thermal shocks are possible without removing the control lever or shutting off the cold water supply.
Flow rate regulated at 5 lpm.
Chrome-plated brass body.
Hygiene control lever L. 200mm requires no manual contact.
Supplied with offset standard wall connectors M1/2" M3/4".
Recommended installation height: 110 - 200mm above the basin surface.
Sequential mechanical mixer ideal for Healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
10-year warranty.

ADVANTAGES

TECHNICAL CHARACTERISTICS

Sequential mechanical basin mixer - Ref.2641S

Technology	Securitouch
Flow rate	5 lpm
Connector	M1/2"
Finish	Chrome-plated brass
Spout Length	200 mm

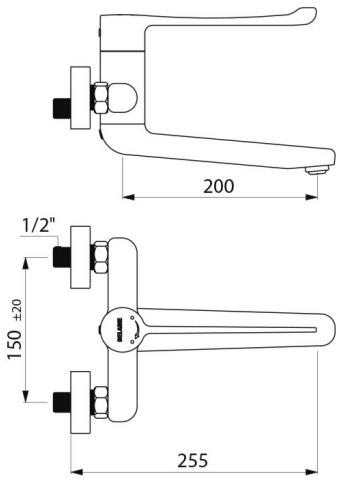

© Delabie