DELABIE

Sequential mechanical basin mixer



Ref. 2436

Sequential mechanical mixer with swivelling spout L. 200mm

DESCRIPTION

Sequential mechanical basin mixer - Ref.2436


Wall-mounted 90° sequential basin mixer.
Open and closing on cold water.
Flat swivelling under spout L. 200mm with hygienic flow straightener suitable for fitting a BIOFIL terminal filter.
Securitouch thermal insulation prevents burns.
Ø 35mm ceramic cartridge with pre-set maximum temperature limiter.
Body and spout with smooth interiors and low water volume (reduces bacterial development).
Flow rate regulated at 5 lpm.
Chrome-plated brass body.
Non-manual contact operation with Hygiene control lever L. 200mm.
Supplied with 2 offset STOP/CHECK connectors M½" M¾" ideal for hospitals.
10-year warranty.

ADVANTAGES

TECHNICAL CHARACTERISTICS

Sequential mechanical basin mixer - Ref.2436

Technology	Securitouch
Flow rate	5 lpm
Connector	M1/2"
Finish	Chrome-plated brass
Spout Length	200 mm

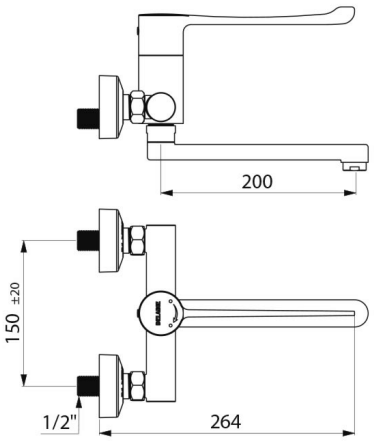

© Delabie