DELABIE

Sequential mechanical basin mixer



Ref. 2437

Sequential mechanical mixer with fixed spout L. 200mm

DESCRIPTION

Sequential mechanical basin mixer - Ref.2437


Wall-mounted sequential mechanical basin mixer.
Opens and closes on cold water with a 90° turning range.
Flat, fixed under spout L. 200mm with hygienic flow straightener.
Securitouch thermal insulation prevents burns.
Mixer with Ø 35mm ceramic cartridge.
Pre-set maximum temperature limiter.
Body and spout with smooth interiors and low water volume (reduce niches where bacteria can develop).
Flow rate regulated at 5 lpm.
Chrome-plated brass body.
Hygiene control lever L. 200mm requires no manual contact.
Supplied with offset STOP/CHECK wall connectors M1/2" M3/4", ideal for hospitals.
Recommended installation height: 110 - 200mm above the top of the basin.
Sequential mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
10-year warranty.

ADVANTAGES

TECHNICAL CHARACTERISTICS

Sequential mechanical basin mixer - Ref.2437

Technology	Securitouch
Flow rate	5 lpm
Connector	M1/2"
Finish	Chrome-plated brass
Spout Length	200 mm

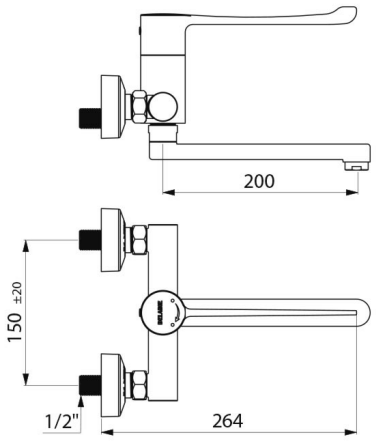

© Delabie