


## Auto-rewind 304 stainless steel hose reel

Ref. 5675T2

With 15m flexible hose and hand spray



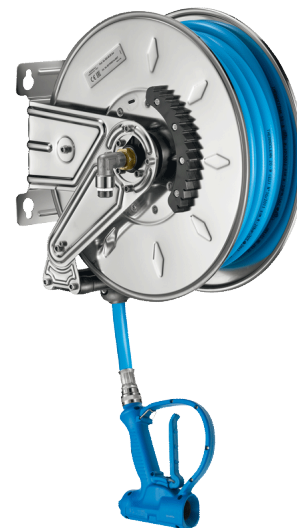


### DESCRIPTION

#### Auto-rewind 304 stainless steel hose reel - Ref.5675T2

Auto-rewind hose reel with flexible hose L. 15m and guide rollers:  
 Maximum temperature 50°C.  
 Flow rate 23 lpm at 3 bar.  
 Maximum pressure 20 bar, 12 bar with trigger-op hand spray.  
 304 Stainless steel base and drum Ø 390mm.  
 Order separately: an angled stopcock with integrated vacuum breaker to prevent the back flow of polluted water into the mains supply.  
 10-year warranty.

### ADVANTAGES

-  Hose reel with smooth surfaces for easy cleaning
-  Stainless steel hose reel with hose lock
-  304 stainless steel: reduces bacterial development

### TECHNICAL CHARACTERISTICS

#### Auto-rewind 304 stainless steel hose reel - Ref.5675T2

Height	400 mm
Length	186 mm
Flow rate	14 lpm
Connector	3/4"
Finish	304 Stainless steel
Depth	410 mm

