DELABIE

SECURITHERM thermostatic sink mixer

Ref. H9612

Single hole thermostatic mixer with retracting hand spray



DESCRIPTION

SECURITHERM thermostatic sink mixer - Ref.H9612

Deck-mounted SECURITHERM thermostatic basin mixer.
Sequential thermostatic mixer: opens and closes with cold water.
Perfectly suited to baby baths.
Anti-scalding failsafe: immediate shut-off if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
No risk of cross flow between the hot and cold water.
No non-return valves on the inlets.
Single hole mixer with swivelling spout H. 105mm L. 200mm.
Retracting hand spray with 2 jet options: flow straightener/rain effect.
Scale-resistant sequential thermostatic cartridge for sequential control of the flow rate and temperature.
Temperature control: cold water to 40°C.
Maximum temperature limiter set at 40°C.
Body with smooth interior.
Flow rate regulated at 3 lpm.
No manual contact thanks to Hygiene control lever L. 100mm.
Mixed water brass outlet L. 105mm.
BIOSAFE flexible shower hose reduces bacterial proliferation: transparent polyurethane, smooth interior and exterior.
Flexible with narrow interior Ø 6mm: low water volume.
Specific counterweight.
PEX flexibles F3/8".
Fixing reinforced by 2 stainless steel rods.
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

© Delabie

TECHNICAL CHARACTERISTICS

SECURITHERM thermostatic sink mixer - Ref.H9612

Technology	SECURITHERM sequential Securitouch
Flow rate	3 lpm
Connector	F3/8"
Finish	Chrome-plated brass
Drop Height	105 mm
Spout Length	200 mm
Temperature limiter	40 °C

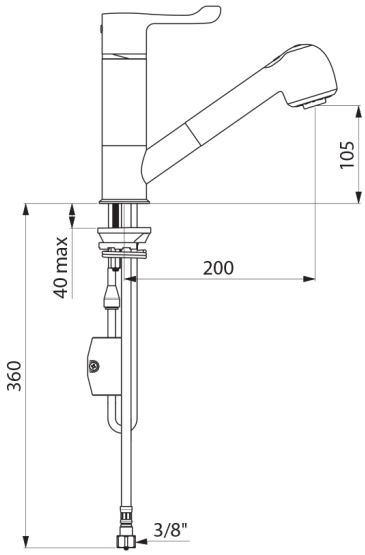

© Delabie