DELABIE

Shower kit with thermostatic mixer



Ref. H9769SHYG

SECURITHERM Securitouch auto-draining thermostatic shower kit

DESCRIPTION

Shower kit with thermostatic mixer - Ref.H9769SHYG

SECURITHERM dual control thermostatic shower kit with auto-draining device includes:
• Mixer with scale-resistant thermostatic cartridge:
- No non-return valves (less bacterial proliferation).
- Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
- Securitouch thermal insulation prevents burns.
- Scale-resistant thermostatic cartridge for temperature adjustment.
- ¼-turn ceramic head for flow rate adjustment.
- Temperature control up to 41°C.
- Double temperature limiter: 1st limiter set at 38°C, 2nd limiter set at 41°C.
- Thermal shocks are possible without removing the control knob or shutting off the cold water supply.
- Flow rate limited to 9 lpm at 3 bar.
- Ergonomic controls.
- M½" shower outlet.
- M¾" inlets with integrated filters.
- Supplied with 2 offset standard wall connectors M½" M¾".
• Chrome-plated shower head Ø 100mm with 5 jet options, with manual system for removing scale (ref. 813) and adjustable, wall-mounted, chrome-plated support (ref. 845).
• Auto-draining device FM½" fits between the mixer outlet and the flexible hose, automatically drains the flexible and the shower head (ref. 880).
10-year warranty.


ADVANTAGES

© Delabie

TECHNICAL CHARACTERISTICS

Shower kit with thermostatic mixer - Ref.H9769SHYG

Technology	SECURITHERM dual control thermostatic mixer, Securitouch, no-non-return valves
Length	260 mm
Flow rate	8 lpm
Connector	M1/2"
Finish	Chrome-plated brass
Temperature limiter	41 °C
Depth	84 mm

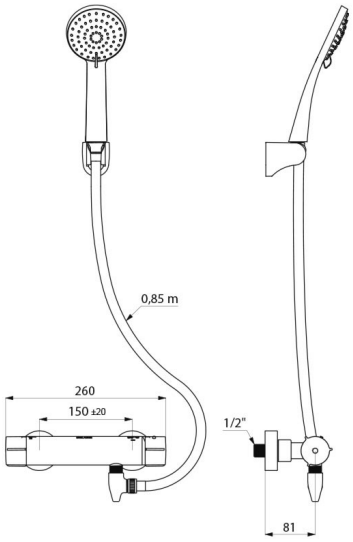

© Delabie