DELABIE

TEMPOMATIC 4 electronic tap

Ref. 443516

Integrated batteries



DESCRIPTION

TEMPOMATIC 4 electronic tap - Ref.443516

Wall-mounted electronic basin tap:
Lithium 123 6V batteries integrated.
Reduced-stagnation solenoid valve and electronic unit integrated into the body of the tap.
Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 - 6 lpm.
Scale-resistant flow straightener.
Duty flush (~60 seconds every 24 hours after last use).
Active, infrared presence detection, sensor at the end of the spout optimises detection.
Chrome-plated metal body, L. 190mm.
Cap fixed in place by 2 concealed screws.
Stopcock.
For cross wall installation.
Anti-blocking security.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- Total hygiene: no manual contact
- 90% water savings
- Batteries integrated in the body
- Anti-bacterial duty flush

TECHNICAL CHARACTERISTICS

TEMPOMATIC 4 electronic tap - Ref.443516

Technology	Electronic
Flow rate	3 lpm
Connector	M1/2"
Supply	6V batteries
Spout Length	190 mm
Installation:	Cross wall

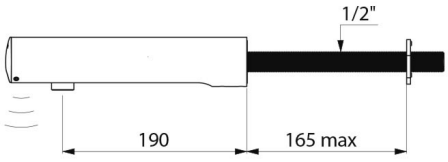

© Delabie