DELABIE

BINOPTIC electronic tap

Ref. 370SBOX-370010

Mains supply



DESCRIPTION

BINOPTIC electronic tap - Ref.370SBOX-370010

Recessed electronic basin tap:
Mains supply with 230/6V (cable and transformer supplied).
Bright polished stainless steel plate 145 x 145mm with integrated electronics.
Recessed waterproof housing:
- Collar with waterproof seal.
- Hydraulic connection from the exterior and maintenance from the front.
- Modular installation (rails, solid walls, panels).
- Compatible with walls from 10 to 120mm (whilst maintaining the minimum recessing depth of 83mm).
- Adaptable standard pipework or "pipe in pipe".
- Integrated stopcock and flow rate adjuster, filter and solenoid valve are accessible from the front.
- BINOPTIC tap F1/2".
- Supplied in 2 kits: secured system purge without sensitive elements.
Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 to 6 lpm.
Scale-resistant flow straightener.
Duty flush every 24 hours (can be adjusted to 12 hours or OFF) after the last use.
Active, infrared presence detection, sensor at the end of the spout optimises detection.
Anti-blocking security.
Smooth interior spout with low volume of water (limits bacterial niches).
Suitable for people with reduced mobility.
10-year warranty.

Kit composition:
(370SBOX): protected recessed housing, control is configured for system flush, connection accessories.
(370010): spout and plate, transformer, waterproof collar, control, solenoid valve, filter and stopcock.

ADVANTAGES


- Total hygiene: no manual contact
- 90% water savings
- Adjustable and modular waterproof housing
- Concealed fixings

© Delabie

TECHNICAL CHARACTERISTICS

BINOPTIC electronic tap - Ref.370SBOX-370010

Technology	Electronic
Connector	F1/2"
Finish	Bright polished stainless steel
Supply	230/6V mains supply (recessed)
Spout Length	110 mm
Installation:	Reccesed

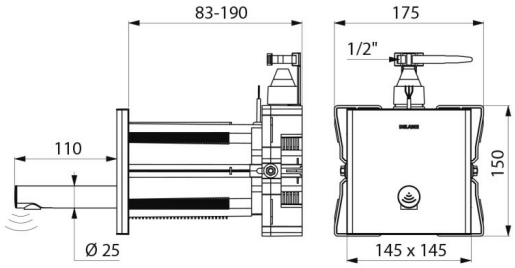

© Delabie