
DELABIE

TEMPOMIX 3 time flow mixer

Ref. 794165

Soft-touch operation, stopcocks

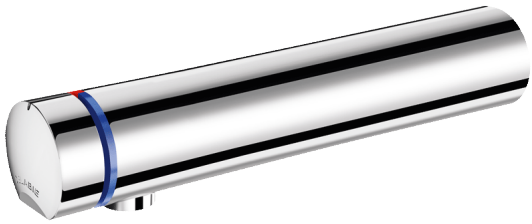

DESCRIPTION

TEMPOMIX 3 time flow mixer - Ref.794165

Wall-mounted single control time flow basin mixer:
Soft-touch operation.
Temperature control and operation via the push-button.
Time flow pre-set at ~7 seconds.
Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 - 6 lpm.
Tamperproof, scale-resistant flow straightener.
Chrome-plated solid brass body L. 190mm.
For cross wall installation.
PEX flexibles F3/8" with stopcocks, filters and non-return valves.
Adjustable maximum temperature limiter.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- Soft-touch operation
- 85% water savings
- Solid brass
- Sleek design
- Install behind the partition

TECHNICAL CHARACTERISTICS

TEMPOMIX 3 time flow mixer - Ref.794165

Technology	Time flow
Flow rate	3 lpm
Connector	F3/8"
Spout Length	190 mm
Installation:	Cross wall

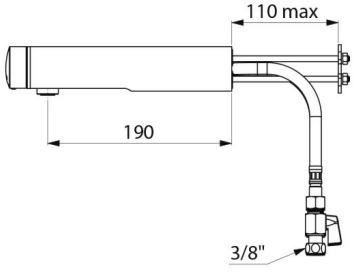

© Delabie