DELABIE

# SECURITHERM thermostatic basin mixer

Ref. H9600610

Single hole thermostatic sequential mixer, H. 85mm L. 120mm

## DESCRIPTION

**SECURITHERM thermostatic basin mixer - Ref.H9600610**

Deck-mounted thermostatic basin mixer.
Thermostatic sequential mixer: opens and closes with cold water.
Single hole mixer with straight spout H. 85mm L. 120mm fitted with a hygienic flow straightener for no impurity retention and resistance to thermal shocks.
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
No risk of cross flow between hot and cold water.
No non-return valve on the inlets.
Scale-resistant thermostatic sequential cartridge for single control of flow rate and temperature.
Temperature can be adjusted from cold water up to 40°C with maximum temperature limiter set at 40°C.
Thermal and chemical shocks are possible.
Body and spout with smooth interiors and low water volume.
Flow rate regulated at 7 lpm.
No manual contact thanks to Hygiene control lever L. 146mm.
No pop-up waste.
Supplied with copper tails and stopcocks in chrome-plated brass Ø 15mm.
Fixing reinforced by 2 stainless steel rods.
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
10-year warranty.
Also available with PEX flexibles.

## ADVANTAGES

© Delabie

# TECHNICAL CHARACTERISTICS

**SECURITHERM thermostatic basin mixer - Ref.H9600610**

| | |
|---|---|
| Technology | SECURITHERM sequential, Securitouch |
| Height | 178 mm |
| Flow rate | 7 lpm |
| Connector | M1/2" Ø 15mm |
| Finish | Chrome-plated brass |
| Drop Height | 85 mm |
| Spout Length | 120 mm |
| Temperature limiter | 40 °C |

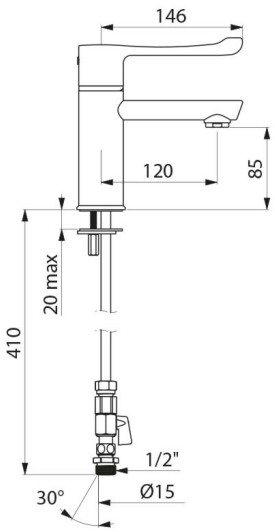


© Delabie