DELABIE

TEMPOSOFT shower panel

Ref. 749300

Time flow



DESCRIPTION

TEMPOSOFT shower panel - Ref.749300

Time flow shower panel:
Anodised aluminium shower panel for wall-mounted, exposed installation.
Top inlet supply for mixed water via in-line stopcock M1/2".
TEMPOSOFT time flow control for mixed water.
Soft-touch operation.
Time flow ~30 seconds.
Flow rate 6 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.
Concealed fixings.
Filter.
Suitable for people with reduced mobility.
10-year warranty.

ADVANTAGES


80% water savings

Aluminium panel, brass controls

TECHNICAL CHARACTERISTICS

TEMPOSOFT shower panel - Ref.749300

Technology	Time flow
Height	1050 mm
Flow rate	6 lpm
Connector	M1/2"
Finish	Aluminium
Width	210 mm
Depth	65 mm
Water supply	In-line

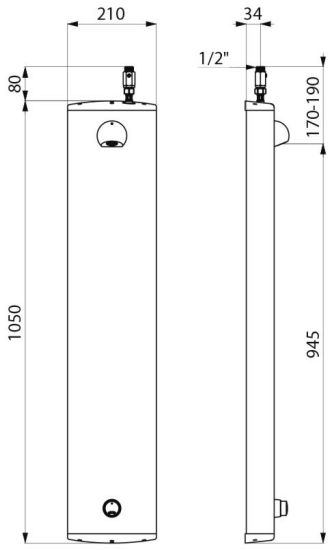

© Delabie