DELABIE

TEMPOMIX 3 shower mixer

Ref. 794470

Time flow single control



DESCRIPTION

TEMPOMIX 3 shower mixer - Ref.794470

Exposed time flow shower mixer:
TEMPOMIX 3 single control mixer, bottom outlet M¾" with M½" connector.
Temperature control and operation via the push-button.
Maximum temperature limiter (can be adjusted by the installer).
For wall-mounted, exposed installation.
Soft-touch operation.
Time flow pre-set at ~30 seconds.
Flow rate 6 lpm at 3 bar, can be adjusted from 6 lpm - 12 lpm.
Chrome-plated solid brass.
Integrated filters and non-return valves.
Chrome-plated metal push-button.
M½" offset connectors for 130 - 170mm centres.
Suitable for people with reduced mobility.
10-year warranty.

ADVANTAGES


Soft-touch operation

Time flow system tested to over 500,000 operations

TECHNICAL CHARACTERISTICS

TEMPOMIX 3 shower mixer - Ref.794470

Technology	Time flow
Flow rate	9 lpm
Connector	M1/2"
Width	150 mm

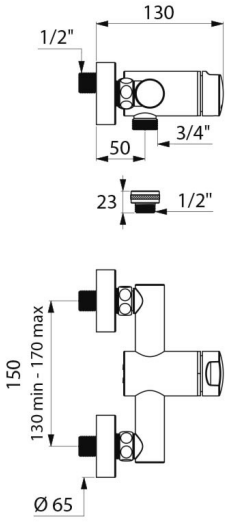

© Delabie