DELABIE

TEMPOMATIC shower panel

Ref. 452310

Electronic



DESCRIPTION

TEMPOMATIC shower panel - Ref.452310

Electronic thermostatic shower panel:
Anodised aluminium shower panel for wall-mounted, exposed installation.
With concealed inlet via flexible, M1/2".
TEMPOMATIC electronic mixer for mixed water supply.
Battery-operated with 223 6V Lithium battery.
Infrared presence detection. Shower starts when hand is at 4cmfrom the sensor.
Shuts off on demand or automatically after ~60 seconds.
Duty flush (~60 seconds every 24 hours after the last use).
Flow rate set at 6 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.
Concealed fixings.
Filter.
Suitable for people with reduced mobility.
10-year warranty.

ADVANTAGES


Total hygiene: operate without manual contact

Automatic flush anti-bacterial proliferation

TECHNICAL CHARACTERISTICS

TEMPOMATIC shower panel - Ref.452310

Technology	Electronic
Height	1050 mm
Flow rate	6 lpm
Connector	M1/2"
Finish	Aluminium
Supply	6V battery
Width	210 mm
Depth	65 mm
Water supply	Concealed

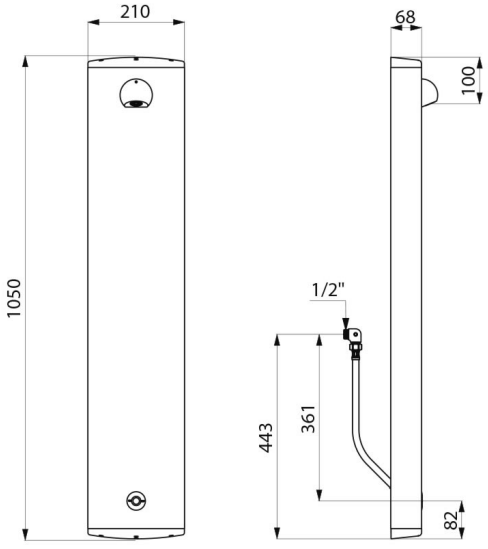

© Delabie