DELABIE

SECURITHERM shower panel

Ref. 792314

Thermostatic time flow



DESCRIPTION

SECURITHERM shower panel - Ref.792314

Thermostatic time flow shower panel:
Large model stainless steel shower panel for wall-mounted, exposed installation.
Concealed inlet via flexibles M1/2".
SECURITHERM thermostatic mixer.
Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.
Anti-scalding failsafe: automatic shut-off if cold water fails.
Anti-cold showers function: automatic shut-off if hot water fails.
Thermal shocks are possible.
Soft-touch operation.
Time flow ~30 seconds.
Flow rate 6 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.
Integrated soap dish.
M1/2" stopcocks.
Concealed fixings.
Filters and non-return valves.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- Thermostatic temperature regulation
- Instant shut-off if cold water fails
- 80% water savings
- Stainless steel sheath, brass controls

TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref.792314

Technology	Time flow
Height	1220 mm
Flow rate	6 lpm
Connector	M1/2"
Finish	Stainless steel
Temperature limiter	Thermostatic
Width	250 mm
Depth	100 mm
Water supply	Concealed

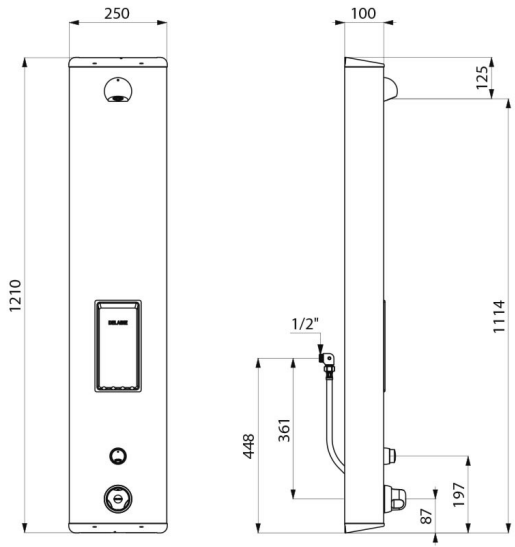

© Delabie