DELABIE

TEMPOSOFT 2 shower kit

Ref. 747801

Time flow



DESCRIPTION

TEMPOSOFT 2 shower kit - Ref.747801

Time flow shower kit for exposed installation:
TEMPOSOFT 2 M1/2" time flow valve for mixed water supply from beneath.
For wall-mounted installation.
Soft-touch operation.
Time flow ~30 seconds.
Flow rate 6 lpm at 3 bar.
Chrome-plated, tamperproof TONIC JET shower head with scale-resistant nozzle and automatic flow rate regulation.
Chrome-plated solid brass.
Reinforced shower column Ø 16mm and collar (mounting bracket and screws supplied).
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- Water savings up to 80%
- Soft-touch operation
- Time flow system tested to over 500,000 operations

TECHNICAL CHARACTERISTICS

TEMPOSOFT 2 shower kit - Ref.747801

Technology	Time flow
Height	1000 mm
Flow rate	6 lpm
Connector	1/2"

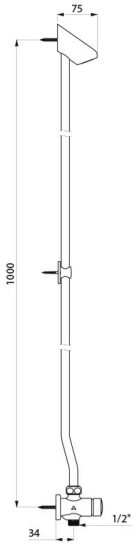

© Delabie