
DELABIE

TEMPOSOFT 2 shower valve

Ref. 747800

Time flow

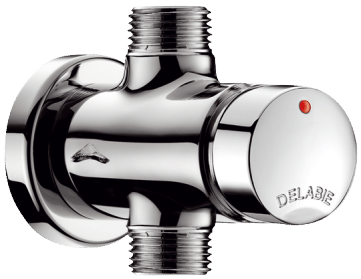

DESCRIPTION

TEMPOSOFT 2 shower valve - Ref.747800

Time flow exposed shower valve :
TEMPOSOFT 2 M1/2" time flow valve for mixed water supply.
For wall-mounted installation.
Straight for in-line inlet.
Soft-touch operation.
Time flow ~30 seconds.
Flow rate pre-set at 6 lpm at 3 bar can be adjusted.
Chrome-plated solid brass body.
Suitable for people with reduced mobility.
10-year warranty.

ADVANTAGES


Soft-touch operation

System tested to over 500,000 operations

TECHNICAL CHARACTERISTICS

TEMPOSOFT 2 shower valve - Ref.747800

Technology	Time flow
Height	70 mm
Flow rate	9 lpm
Connector	1/2"
Water supply	In-line



© Delabie