DELABIE

TEMPOSTOP shower valve

Ref. 749BOX-749218CXL

Time flow



DESCRIPTION

TEMPOSTOP shower valve - Ref.749BOX-749218CXL

Recessed time flow shower valve:
Tamperproof polished stainless steel wall plate 160 x 220mm.
Waterproof recessing housing.
A 10 to 30mm allowance for different wall finishes.
TEMPOSTOP ¾" time flow valve for mixed water supply.
Ligature-resistant ring.
Time flow ~30 seconds.
Flow rate 6 lpm at 3 bar, can be adjusted.
Solid brass body.
Concealed fixings.
Stopcock M½" with filter.
Chrome-plated metal control.
10-year warranty.

Kit contents:
(749BOX): recessed housing with cover, valve configured for system flush, time flow cartridge, stopcocks and connection accessories.
(749218CXL): control plate, collar for waterproofing, shower head.

ADVANTAGES

- Water savings up to 80%
- Ligature-resistant, streamlined design
- System tested to over 500,000 operations

TECHNICAL CHARACTERISTICS

TEMPOSTOP shower valve - Ref.749BOX-749218CXL

Technology	Time flow
Length	220 mm
Flow rate	12 lpm
Connector	1/2"
Width	160 mm
Water supply	Concealed

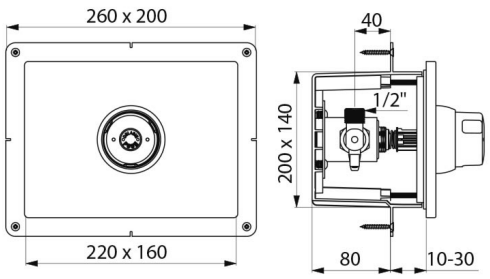

© Delabie