DELABIE

TEMPOSTOP shower valve

Ref. 748000

Time flow

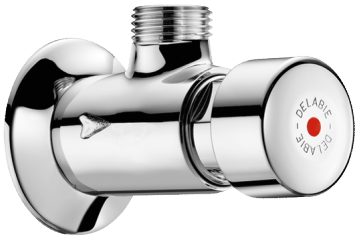

DESCRIPTION

TEMPOSTOP shower valve - Ref.748000

Time flow shower valve for exposed installation:
TEMPOSTOP M1/2" time flow valve for mixed water supply.
For wall-mounted installation.
Angled for recessed inlet.
Time flow ~15 seconds.
Flow rate pre-set at 9 lpm at 3 bar, can be adjusted.
Chrome-plated solid brass body and push-button.
10-year warranty.

ADVANTAGES

- System tested to over 500,000 operations
- Chrome-plated solid brass

TECHNICAL CHARACTERISTICS

TEMPOSTOP shower valve - Ref.748000

Technology	Time flow
Flow rate	9 lpm
Connector	1/2"



© Delabie