DELABIE

TEMPOMIX shower panel



Ref. 79030015

Time flow single control

DESCRIPTION

TEMPOMIX shower panel - Ref.79030015

Time flow shower panel with fixed shower head:
Anodised aluminium shower panel for wall-mounted, exposed installation.
Top inlet via in-line stopcocks and conical Ø 15mm inlets.
TEMPOMIX mixer with adjustable maximum temperature limiter.
Time flow ~30 seconds, soft-touch operation.
Flow rate 6 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.
Concealed fixings.
Filters and non-return valves.
10-year warranty.


ADVANTAGES

- 80% water savings
- Temperature selection on mixer
- Aluminium body, brass controls

TECHNICAL CHARACTERISTICS

TEMPOMIX shower panel - Ref.79030015

Technology	Time flow
Height	1050 mm
Flow rate	6 lpm
Connector	M1/2" Ø 15mm
Finish	Aluminium
Width	210 mm
Depth	65 mm
Water supply	In-line

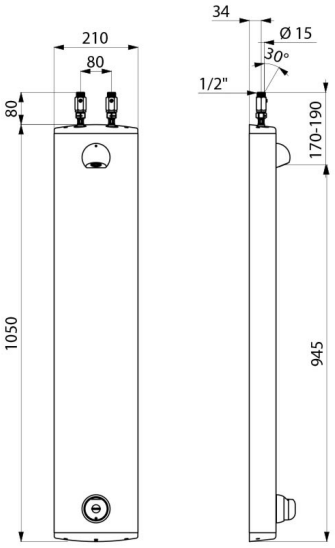

© Delabie