DELABIE

SECURITHERM shower panel

Ref. 79230415

Thermostatic time flow



DESCRIPTION

SECURITHERM shower panel - Ref.79230415

Thermostatic time flow shower panel:
Large model stainless steel shower panel for wall mounted, exposed installation.
Top inlet via in-line stopcocks and Ø 15mm conical inlets.
SECURITHERM thermostatic mixer.
Adjustable temperature control from cold water up to 41°C.
Anti-scalding safety: automtaic shut-off if cold or hot water supply fails.
Thermal shocks are possible.
Soft-touch operation.
Time flow ~30 seconds.
Flow rate 6 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.
Integrated soap dish.
Concealed fixings.
Filters and non-return valves.
Suitable for people with reduced mobility
10-year warranty.


ADVANTAGES

- Thermostatic temperature regulation
- Instant shut-off if cold water fails
- 80% water savings
- Aluminium panel, brass controls

TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref.79230415

Technology	Time flow
Height	1220 mm
Flow rate	6 lpm
Connector	M1/2" Ø 15mm
Finish	Stainless steel
Temperature limiter	Thermostatic
Width	250 mm
Depth	100 mm
Water supply	In-line

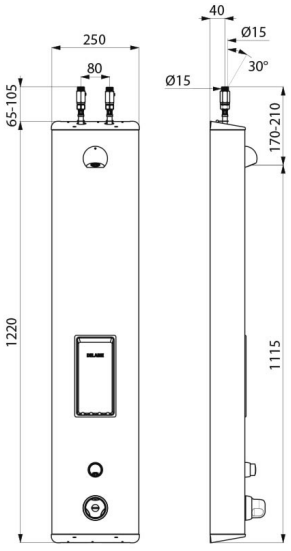

© Delabie