DELABIE

# SECURITHERM shower panel



Ref. 79230015

Thermostatic time flow

## DESCRIPTION

**SECURITHERM shower panel - Ref.79230015**

Time flow thermostatic shower panel:
Anodised aluminium shower panel for wall-mounted, exposed installation.
Top inlet via in-line stopcocks and conical Ø 15mm inlets.
SECURITHERM thermostatic mixer.
Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C
Anti-scalding safety: automatic shut-off if cold or hot water supply fails.
Anti-cold showers function: automatic shut-off if hot water fails.
Thermal shocks are possible.
Soft-touch operation.
Time flow ~30 seconds.
Flow rate 6 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.
Concealed fixings.
Filters and non-return valves.
Suitable for people with reduced mobility.
10-year warranty.


## ADVANTAGES

- Themostatic control
- Instant shut-off if cold water supply fails
- 80% water savings
- Aluminium panel, brass controls

## TECHNICAL CHARACTERISTICS

**SECURITHERM shower panel - Ref.79230015**

| | |
|---|---|
| Technology | Time flow |
| Height | 1050 mm |
| Flow rate | 6 lpm |
| Connector | M1/2" Ø 15mm |
| Finish | Aluminium |
| Temperature limiter | Thermostatic |
| Width | 210 mm |
| Depth | 65 mm |
| Water supply | In-line |

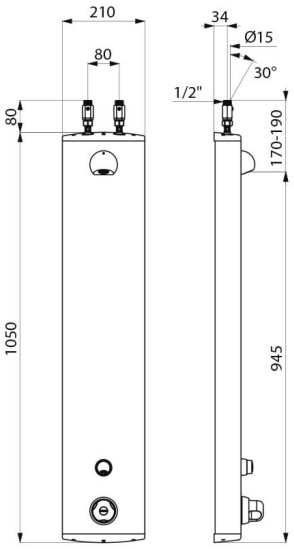


© Delabie