DELABIE

TEMPOMATIC urinal valve

Ref. 477000

Electronic valve with mains supply



DESCRIPTION

TEMPOMATIC urinal valve - Ref.477000

Exposed electronic urinal valve:
Mains supply, electronic unit 12V, solenoid valve, stopcock and flow rate adjuster M½".
White powder-coated stainless steel wall box.
Shockproof infrared presence detection.
Detection delay is 3 sec.
Automatic pre-rinse is possible.
Time flow 3 sec., can be adjusted from 3 to 12 sec.
Hygienic duty flush, every 24hr after last use,prevents vacuums in the siphon.
Flow rate 0.3 l/sec. at 3 bar pressure, can be adjusted.
Order transformer separately 230/12V.
Straight for in-line supply, outlet M½".
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- Total hygiene: no manual contact
- ECO time flow set at 3 seconds
- Electronic unit
- Automatic anti-bacterial proliferation duty flush

TECHNICAL CHARACTERISTICS

TEMPOMATIC urinal valve - Ref.477000

Technology	Electronic
Height	205 mm
Flow rate	0.3 l/sec
Connector	M1/2"
Supply	230/12V mains supply
Width	250 mm
Depth	65 mm

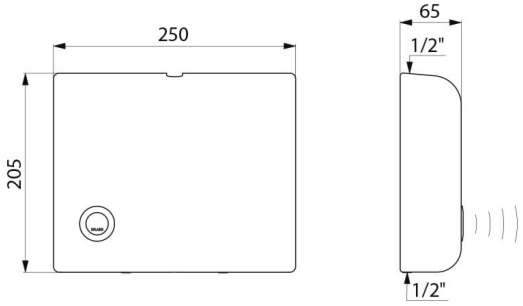

© Delabie