DELABIE

TEMPOSTOP time flow urinal valve



Ref. 779421

Time flow 7 seconds

DESCRIPTION

TEMPOSTOP time flow urinal valve - Ref.779421

Recessed time flow urinal valve:
For standard or siphon action urinals.
For recessed installation.
Recessing depth can be adjusted from 25 to 45mm.
Stainless steel wall plate Ø 160x160mm.
Time flow ~7 seconds.
Flow rate pre-set at 0.25 l/sec. at 3 bar, can be adjusted.
Solid brass body M½".
10-year warranty.

This model does not have a waterproof recessing box. The installer must ensure that the recessing area is waterproof and any leaks or condensates can drain away (see installation guide).


ADVANTAGES

- Time flow 7 seconds
- Wall recessed installation
- Withstands over 500,000 operations

TECHNICAL CHARACTERISTICS

TEMPOSTOP time flow urinal valve - Ref.779421

Technology	Time flow
Inaltime	160 mm
Lungime	160 mm
Debit	0.25 l/sec.
Conector	1/2"
Spout Length	160 mm
Depth	160 mm

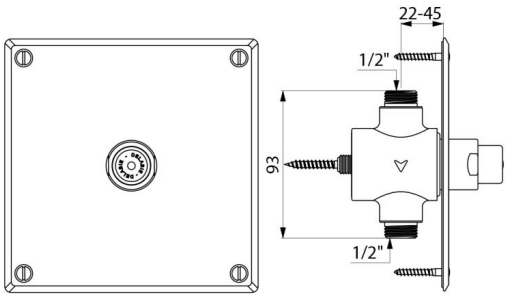

© Delabie