DELABIE

TEMPOCHASSE direct flush valve

Ref. 760220

Direct flush WC valve



DESCRIPTION

TEMPOCHASSE direct flush valve - Ref.760220

Flush system without cistern: directly connected to pipework.
Satin finish stainless steel plate 320 x 220mm.
Time flow ~7 seconds.
Vacuum breaker.
In-line raw brass stopcock and flow rate / flush volume adjuster.
Solid brass body and chrome-plated metal push-button.
Shockproof mechanism.
In-line inlet F1".
Connection washer Ø 32/55mm.
Base flow rate: 1.2 L/sec.
10-year warranty.

This model does not have a waterproof recessing housing. The installer must ensure that the recessing area is waterproof and any leaks or condensation can drain away (see installation guide).


ADVANTAGES

- No cistern: no stagnant water
- Wall recessed installation
- Powerful flush and immediately available
- Direct flush reduces the risk of leaks

TECHNICAL CHARACTERISTICS

TEMPOCHASSE direct flush valve - Ref.760220

Technology	Time flow
Inaltime	320 mm
Lungime	220 mm
Conector	1"
Heith	320 mm

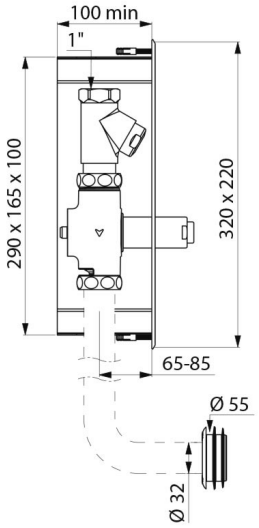

© Delabie