DELABIE

TEMPOMATIC tap with BIOCLIP removable spout



Ref. 20804T215

Electronic wall-mounted tap with mains supply



DESCRIPTION

TEMPOMATIC tap with BIOCLIP removable spout - Ref.20804T215

Independent IP65 electronic control unit.
230/12V mains supply with transformer.
Supplied with 2 removable BIOCLIP stainless steel spouts
L. 190mm Ø 28mm for continuous use during cleaning/disinfection.
Can be replaced with a BIOFIL filter or disposable Hostaform® spout.
Base and spout with smooth interiors (reduces bacterial development).
Adjustable duty flush (pre-set at ~60 seconds every 24 hours after last use).
Flow rate limited to 4 lpm at 3 bar.
Separate sensor for mounting on panels.
Solenoid valve Ø 15mm for compression fittings with integrated filter.
Shock-resistant infrared presence detection sensor.
Ø 60mm chrome-plated brass base.
Anti-blocking security.
Recommended installation height: 110 - 200mm above the basin surface.
Suitable for people with reduced mobility.
10-year warranty.

Two shut-off options:
- Standard mode: timed flow with automatic shut-off.
- ON/OFF mode: user shuts off flow voluntarily or automatic shut-off after 30 minutes of flow.
Thermal shocks are possible.


ADVANTAGES

© Delabie

TECHNICAL CHARACTERISTICS

TEMPOMATIC tap with BIOCLIP removable spout - Ref.20804T215

Technology	Electronic
Lungime	129 mm
Debit	4 lpm
Conector	Ø 15mm
Finisaj	Chrome-plated brass
Spout Length	188 mm
Depth	190 mm

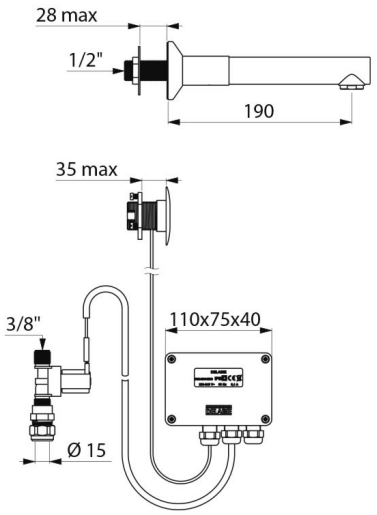

© Delabie