DELABIE

BINOPTIC electronic tap

Ref. 379ENC

Mains supply



DESCRIPTION

BINOPTIC electronic tap - Ref.379ENC

Recessed electronic basin tap:
Independent IP65 electronic control unit.
230/12V mains supply with transformer.
Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 to 6 lpm.
Scale-resistant flow straightener.
Adjustable duty flush (pre-set flush ~60 seconds every 24 hours after last use).
Active, infrared presence detection, sensor at the end of the spout optimises detection.
Filter and solenoid valve M3/8".
Chrome-plated brass body.
Chrome-plated spout L. 200mm for recessed installation.
Anti-blocking security.
Spout with smooth interior and low volume of water (limits bacterial niches).
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- Total hygiene: no manual contact
- 90% water savings
- Independent IP65 electronic control unit
- Anti-bacterial proliferation duty flush

TECHNICAL CHARACTERISTICS

BINOPTIC electronic tap - Ref.379ENC

Technology	Electronic
Debit	3 lpm
Conector	M3/8"
Supply	230/12V mains supply
Spout Length	200 mm
Installation:	Reccesed

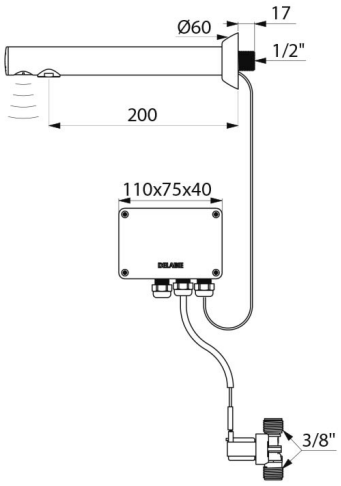

© Delabie