DELABIE

# SECURITHERM BIOCLIP thermostatic sink mixer

Ref. H9611

Wall-mounted sequential thermostatic mixer



## DESCRIPTION

**SECURITHERM BIOCLIP thermostatic sink mixer - Ref.H9611**

Wall-mounted thermostatic sink mixer with removable BIOCLIP spout.
Mixer supplied with 2 removable stainless steel spouts L.136mm.
Sequential thermostatic mixer: opens and closes with cold water.
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
No risk of cross flow between hot and cold water.
No non-return valves on the inlets.
Scale-resistant sequential thermostatic cartridge for sequential control of flow and temperature.
Temperature control: cold water up to 40°C, with temperature limiter set at 40°C.
Thermal and chemical shocks are possible.
Body and spout with smooth interiors and low water volume.
Flow rate regulated at 7 lpm.
Chrome-plated brass body.
No manual contact thanks to Hygiene control lever L. 146mm.
Mixer with 150mm centres supplied with offset STOP/CHECK connectors M1/2" M3/4" ideal for hospitals.
Mixer ideal for healthcare facilities, retirement homes, hospitals and clinics.
Suitable for people with reduced mobility.
10-year warranty.


## ADVANTAGES

© Delabie

# TECHNICAL CHARACTERISTICS

**SECURITHERM BIOCLIP thermostatic sink mixer - Ref.H9611**

| | |
|---|---|
| Technology | SECURITHERM BIOCLIP sequential Securitouch |
| Debit | 7 lpm |
| Conector | M1/2" |
| Finisaj | Chrome-plated brass |
| Spout Length | 136 mm |
| Temperature limiter | 40 °C |
| Depth | 201 mm |

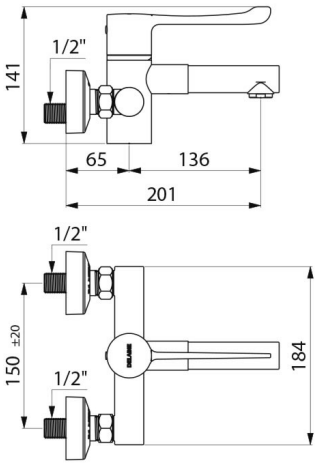


© Delabie