DELABIE

SECURITHERM BIOCLIP thermostatic sink mixer

Ref. H9614P

Wall-mounted sequential thermostatic mixer



DESCRIPTION

SECURITHERM BIOCLIP thermostatic sink mixer - Ref.H9614P

Wall-mounted thermostatic sink mixer with removable BIOCLIP spout.
Supplied with 2 stainless steel spouts L. 136mm.
Thermostatic sequential mixer: opens and closes with cold water.
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
No risk of cross flow between hot and cold water.
No non-return valves on the inlets.
Scale-resistant sequential thermostatic cartridge for sequential control of flow rate and temperature.
Temperature control: cold water up to 40°C. Temperature limiter set at 40°C.
Thermal or chemical shocks are possible.
Body and spout with smooth interiors and low water volume.
Flow rate regulated at 7 lpm.
Chrome-plated brass body.
No manual contact thanks to Hygiene control lever L. 146mm.
Mixer with 200mm centres, supplied with 2 in-line STOP/CHECK M1/2" M3/4" connectors ideal for hospitals.
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

© Delabie

TECHNICAL CHARACTERISTICS

SECURITHERM BIOCLIP thermostatic sink mixer - Ref.H9614P

Technology	SECURITHERM BIOCLIP single control, Securitouch
Inaltime	141 mm
Debit	7 lpm
Conector	M1/2"
Finisaj	Chrome-plated brass
Spout Length	136 mm
Temperature limiter	40 °C
Width	234 mm

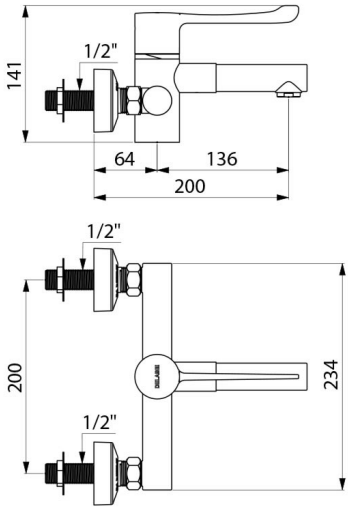

© Delabie