DELABIE

Sequential mechanical basin mixer



Ref. 2641

Sequential mechanical mixer with swivel/fixed spout L. 200mm

DESCRIPTION

Sequential mechanical basin mixer - Ref.2641


Wall-mounted sequential mechanical basin mixer.
Opens and closes with cold water, with 70° turning range.
Swivelling under spout L. 200mm with hygienic BIOSAFE outlet.
Spout can be easily fixed in place.
Securitouch thermal insulation prevents burns.
Mixer with Ø 35mm ceramic cartridge.
Pre-set maximum temperature limiter.
Body and spout with narrow tubes with smooth interiors and very low water volume reduces bacterial and biofilm development.
Thermal shocks are possible without removing the control lever or shutting off the cold water supply.
Flow rate regulated at 5 lpm.
Chrome-plated brass body.
Hygiene control lever L. 200mm requires no manual contact.
Supplied with offset STOP/CHECK wall connectors M1/2" M3/4" ideal for hospitals.
Recommended installation height: 110 - 200mm above the basin surface.
Sequential mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
10-year warranty.

ADVANTAGES

TECHNICAL CHARACTERISTICS

Sequential mechanical basin mixer - Ref.2641

Technology	Securitouch
Debit	5 lpm
Conector	M1/2"
Finisaj	Chrome-plated brass
Spout Length	200 mm

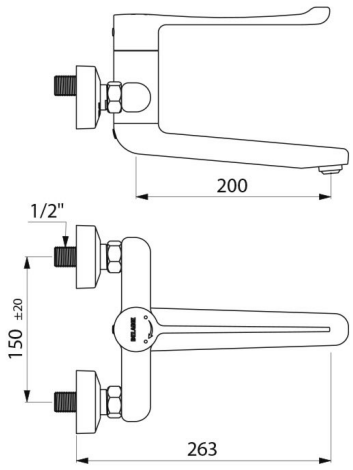

© Delabie