


Auto-rewind 304 stainless steel hose reel

Ref. 5675T2

With 15m flexible hose and hand spray



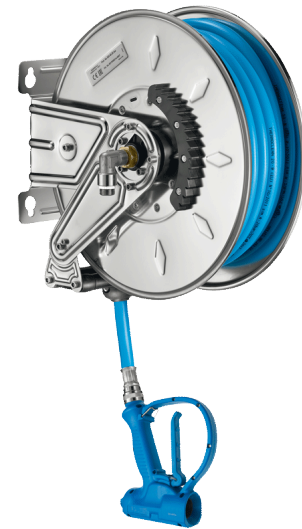


DESCRIPTION

Auto-rewind 304 stainless steel hose reel - Ref.5675T2

Auto-rewind hose reel with flexible hose L. 15m and guide rollers:
 Maximum temperature 50°C.
 Flow rate 23 lpm at 3 bar.
 Maximum pressure 20 bar, 12 bar with trigger-op hand spray.
 304 Stainless steel base and drum Ø 390mm.
 Order separately: an angled stopcock with integrated vacuum breaker to prevent the back flow of polluted water into the mains supply.
 10-year warranty.

ADVANTAGES

-  Hose reel with smooth surfaces for easy cleaning
-  Stainless steel hose reel with hose lock
-  304 stainless steel: reduces bacterial development

TECHNICAL CHARACTERISTICS

Auto-rewind 304 stainless steel hose reel - Ref.5675T2

Inaltime	400 mm
Lungime	186 mm
Debit	14 lpm
Conector	3/4"
Finisaj	304 Stainless steel
Depth	410 mm

