DELABIE

SECURITHERM EP pressure balancing basin mixer



Ref. 2456EP

Wall-mounted mixer with fixed spout L.150, sculptured lever

DESCRIPTION

SECURITHERM EP pressure balancing basin mixer - Ref.2456EP


Wall-mounted SECURITHERM basin mixer with pressure-balancing.
Anti-scalding safety: HW flow rate restricted in the event of CW failure (and vice versa).
Securitouch thermal insulation prevents burns
Flat swivelling under spout L. 150mm with hygienic flow straightener is suitable for the installation of a BIOFIL terminal filter.
Ø 40 ceramic cartridge with pressure balancing and a pre-set maximum limiter.
Body and spout with smooth interiors and low water capacity (limits bacterial niches).
Flow rate regulated at 5 lpm.
Chrome-plated brass body.
Sculptured control lever.
Supplied with STOP/CHECK connectors M1/2" M3/4" ideal for hospitals.
10-year warranty.

ADVANTAGES

TECHNICAL CHARACTERISTICS

SECURITHERM EP pressure balancing basin mixer - Ref.2456EP

Technology	SECURITHERM EP, Securitouch
Debit	5 lpm
Conector	M1/2"
Finisaj	Chrome-plated brass
Spout Length	150 mm

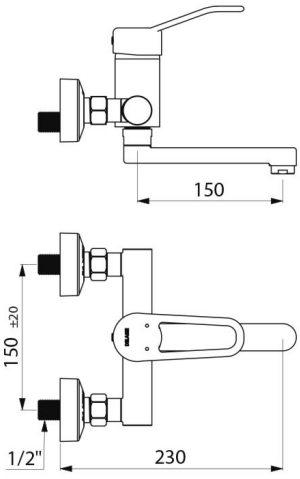

© Delabie