DELABIE

SECURITHERM EP pressure-balancing basin mixer



Ref. 2446LEP

Wall-mounted mixer with swivelling spout L. 150, Hygiene lever L. 150

DESCRIPTION

SECURITHERM EP pressure-balancing basin mixer - Ref.2446LEP


Wall-mounted SECURITHERM Pressure Balancing (EP) basin mixer.
Anti-scalding safety: HW flow is reduced if CW supply fails (and vice versa).
Securitouch thermal insulation prevents burns.
Flat, swivelling under spout L. 150mm with hygienic flow straightener suitable for fitting a BIOFIL terminal filter.
Ø 40mm pressure-balancing ceramic cartridge and pre-set maximum temperature limiter.
Body and spout with smooth interiors and low water volume (reduces niches where bacteria can develop).
Flow rate regulated at 5 lpm.
Chrome-plated brass body.
Hygiene control lever L. 150mm.
Supplied with offset STOP/CHECK connectors M1/2" M3/4" ideal for use in hospitals.
Recommended installation height: 110 - 200mm above the basin.
Wall-mounted mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
10-year warranty.

ADVANTAGES

TECHNICAL CHARACTERISTICS

SECURITHERM EP pressure-balancing basin mixer - Ref.2446LEP

Technology	SECURITHERM EP, Securitouch
Debit	5 lpm
Conector	M1/2"
Finisaj	Chrome-plated brass
Spout Length	150 mm
Temperature limiter	41 °C

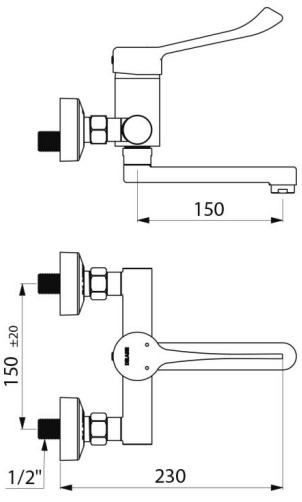

© Delabie