DELABIE

PREMIX NANO thermostatic mixing valve



Ref. 732116

For mixed water from 34 - 60°C

DESCRIPTION

PREMIX NANO thermostatic mixing valve - Ref.732116


Hot water thermostatic mixing valve for mixed water distribution from 34 - 60°C:
For 1 - 2 taps or 1 shower.
Anti-scalding safety: immediate shut-off if cold or hot water fails.
Temperature pre-set at 38°C, can be adjusted by the installer from 34 - 60°C.
Brass body.
Filters and non-return valves.
Minimum flow rate to operate: 3 lpm.
Thermal shocks are possible.
Chrome-plated brass body M1/2" inlets and Ø 15mm conical outlets.
10-year warranty.

ADVANTAGES

TECHNICAL CHARACTERISTICS

PREMIX NANO thermostatic mixing valve - Ref.732116

Technology	Thermostatic
Inaltime	70 mm
Conector	M1/2" Ø 15mm
Finisaj	Chrome-plated

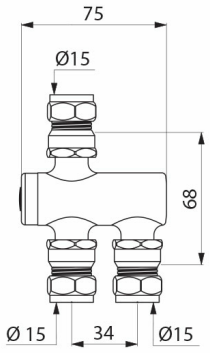

© Delabie