DELABIE

SECURITHERM shower panel



Ref. H9636

Thermostatic shower panel with mixer with no non-return valves

DESCRIPTION

SECURITHERM shower panel - Ref.H9636

SECURITHERM anodised aluminium shower panel for wall-mounted exposed installation:
SECURITHERM sequential thermostatic shower mixer (non-time flow).
Thermostatic sequential mixer: opens and closes with cold water.
Mixer without non-return valves (reduces bacterial proliferation).
No risk of cross flow between the hot and cold water.
Sequential mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.
Cold water failsafe prevents cold showers: shuts off automatically if hot water supply fails.
Adjustable temperature control from cold water up to 39°C.
Maximum temperature limiter set at 39°C, can be adjusted.
Thermal shocks are possible.
Flow rate 9 lpm at 3 bar.
Sliding handset on a chrome-plated riser rail with removable flexible hose via rapid push-fit STOP connector.
Hygiene control lever L. 100mm.
Top inlets with M1/2" stopcocks.
Concealed fixings.
Filters.
Shower panel ideal for healthcare acilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
10-year warranty.

ADVANTAGES

- SECURITHERM: Optimum anti-scalding safety
- Maximum hygiene: no non-return valves
- Thermostatic: total temperature stability
- Sequential: open and closing on cold water


© Delabie

DELABIE

TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref.H9636

Technology	Sequential thermostatic SECURITHERM
Inaltime	1045 mm
Debit	9 lpm
Conector	M1/2"
Finisaj	Aluminium
Supply	Top inlets with M1/2" inline stopcocks
Temperature limiter	39 °C
Width	210 mm
Water supply	Concealed

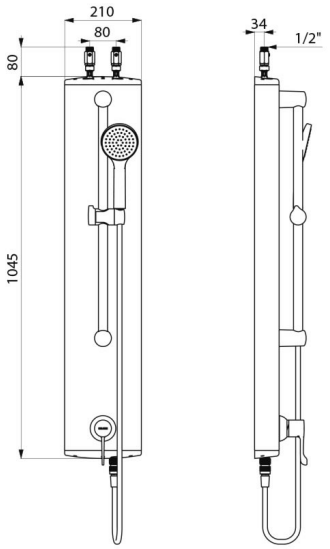

© Delabie