DELABIE

SECURITHERM Securitouch thermostatic shower-bath mixer

Ref. H9752P

Dual control mixer with thermal insulation

DESCRIPTION

SECURITHERM Securitouch thermostatic shower-bath mixer -

Ref.H9752P

SECURITHERM dual control thermostatic shower-bath mixer with:
- Anti-scalding safety: shuts off automatically if cold or hot water supply fails.
- Securitouch thermal insulation to prevent burns.
- Scale-resistant thermostatic cartridge for temperature adjustment.
- ¼-turn ceramic head for flow rate adjustment.
- Temperature control from 25 - 41°C.

Double temperature limiter: first limiter set at 38°C (can be overridden), second limiter set at 41°C.
- Straightforward thermal shock procedure.
- Automatic diverter with low pressure lock maintains the shower position even if the flow rate is too low.
- Chrome-plated brass body and ERGO control knobs.
- M1/2" shower outlet.
- F3/4" inlets with integrated filter and non-return valves.

Mixer with wall-mounted inline M1/2" M3/4" STOP/PURGE connectors.
10-year warranty.

ADVANTAGES

TECHNICAL CHARACTERISTICS

SECURITHERM Securitouch thermostatic shower-bath mixer -

Ref.H9752P

Technology	SECURITHERM dual control thermostatic mixer, Securitouch
Conector	M1/2"
Finisaj	Chrome-plated brass
Temperature limiter	41 °C
Width	286 mm

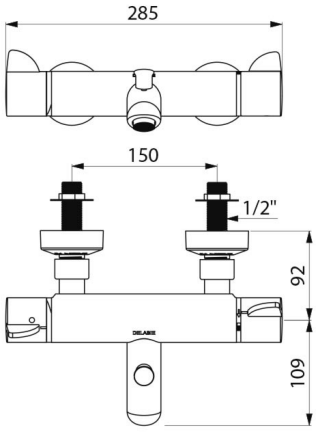

© Delabie