DELABIE

Thermostatic SECURITHERM securitouch auto-drain shower kit.



Ref. H9741HYG

Securitouch dual control thermostatic mixer

DESCRIPTION

Thermostatic SECURITHERM securitouch auto-drain shower kit. -

Ref.H9741HYG

SECURITHERM dual control thermostatic shower kit with auto-draining device:
• Mixer with scale-resistant thermostatic cartridge:
- Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
- Securitouch thermal insulation prevents burns.
- Temperature control from 25 - 41°C.
- Double temperature limiter: first limiter set at 38°C can be overridden, second limiter set at 41°C.
- Thermal shocks are possible without removing the control knob or shutting off the water supply.
- Flow rate regulated at 9 lpm.
- ERGO control knobs and M1/2" shower outlet, bottom outlet.
- Filters and non-return valves integrated on the inlets, F3/4".
- Supplied with 2 offset STOP/PURGE wall connectors, M1/2" M3/4", ideal for hospitals.
• Shower head (ref. 813) with flexible shower hose (ref. 836T3) and chrome-plated wall-mounted adjustable support (ref. 845).
• Auto-draining device FM1/2" for installation between the flexible hose and the shower head, automatically drains the shower head and flexible hose (reduces bacterial development) (ref. 880).
10-year warranty.

ADVANTAGES


© Delabie

TECHNICAL CHARACTERISTICS

Thermostatic SECURITHERM securitouch auto-drain shower kit. -

Ref.H9741HYG

Technology	SECURITHERM dual control thermostatic mixer, Securitouch
Lungime	286 mm
Debit	9 lpm
Conector	M1/2"
Finisaj	Chrome-plated brass
Temperature limiter	41 °C
Depth	95 mm

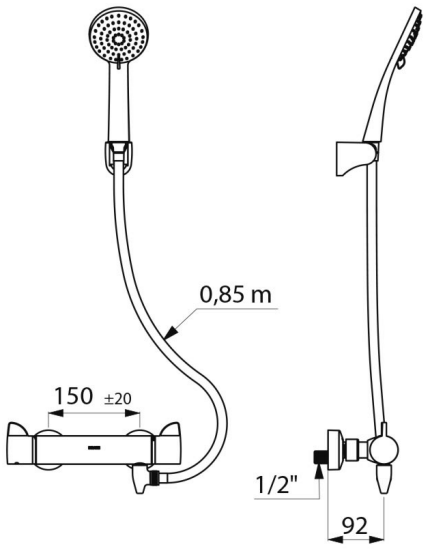

© Delabie