DELABIE

Shower kit with thermostatic mixer



Ref. H9741SKIT

Shower riser rail with thermostatic mixer

DESCRIPTION

Shower kit with thermostatic mixer - Ref.H9741SKIT

Shower riser kit with thermostatic dual control mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Shower riser rail with SECURITHERM thermostatic shower mixer.
Mixer with scale-resistant thermostatic cartridge to adjust the temperature.
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
Scale-resistant thermostatic cartridge adjusts the temperature.
Securitouch thermal insulation prevents burns.
1/4-turn ceramic valve head adjusts the flow rate.
Temperature control from 25°C up to 41°C.
Double temperature limiter: 1st limiter set at 38°C, 2nd limiter set at 41°C.
Thermal shocks are possible without removing the control knob or shutting off the cold water.
Flow rate regulated at 9 lpm.
Chrome-plated body and ERGO control knobs.
M1/2" bottom outlet.
Filters and non-return valves integrated in the inlets, F3/4".
Mixer with offset standard wall connectors.
• Sliding shower head holder (ref. 813) on a chrome-plated riser rail (ref. 821) with soap dish and flexible shower hose (ref. 836T1).
• Shower head retaining collar (ref. 828).
Mixer suitable for people with reduced mobility.
10-year warranty.

ADVANTAGES


© Delabie

DELABIE

TECHNICAL CHARACTERISTICS

Shower kit with thermostatic mixer - Ref.H9741SKIT

Technology	SECURITHERM dual control thermostatic mixer, Securitouch
Lungime	286 mm
Debit	9 lpm
Conector	M1/2"
Finisaj	Chrome-plated brass
Temperature limiter	41 °C
Depth	84 mm

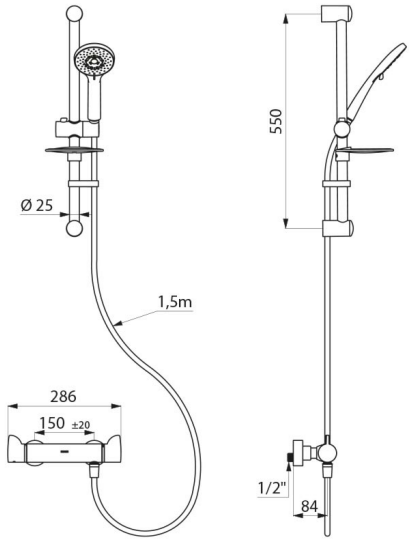

© Delabie