DELABIE

BINOPTIC MIX electronic mixer

Ref. 478MCH

Battery-operated



DESCRIPTION

BINOPTIC MIX electronic mixer - Ref.478MCH

Deck-mounted electronic basin mixer:
Independent IP65 electronic control unit.
123 6V Lithium battery-operated.
Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 to 6 lpm.
Scale-resistant flow straightener.
Adjustable duty flush (pre-set flush ~60 seconds. every 24 hours after last use).
Active, infrared presence detection, sensor at the end of the spout optimises detection.
Chrome-plated brass body.
PEX flexibles with filters and solenoid valves M3/8".
Fixing reinforced by 2 stainless steel rods.
Anti-blocking security.
Spout with smooth interior and low volume of water(reduces niches where bacteria can develop).
Side temperature control with standard lever control and adjustable maximum temperature limiter.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- Total hygiene: no manual contact
- 90% water savings
- Anti-bacterial proliferation duty flush
- Sleek design

TECHNICAL CHARACTERISTICS

BINOPTIC MIX electronic mixer - Ref.478MCH

Technology	Electronic
Debit	3 lpm
Conector	M3/8"
Supply	6V battery
Supply	6V batteries
Drop Height	110 mm
Spout Length	135 mm
Installation:	Deck-mounted

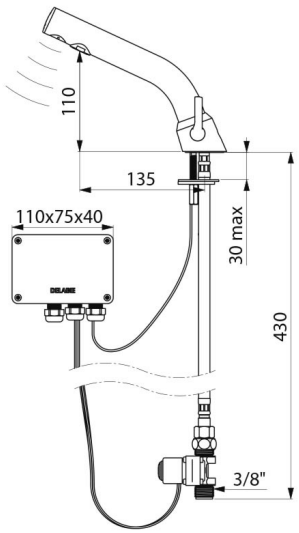

© Delabie