DELABIE

BINOPTIC MIX electronic mixer



Ref. 478MCHLH

Battery-operated

DESCRIPTION

BINOPTIC MIX electronic mixer - Ref.478MCHLH

Deck-mounted electronic basin mixer:
Independent IP65 electronic control unit.
123 6V Lithium battery-operated.
Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 to 6 lpm.
Scale-resistant flow straightener.
Adjustable duty flush (pre-set flush ~60 seconds every 24 hours after last use).
Active, infrared presence detection, sensor at the end of the spout optimises detection.
Chrome-plated brass body.
PEX flexibles with filters and solenoid valves M3/8".
Fixing reinforced by 2 stainless steel rods.
Anti-blocking security.
Spout with smooth interior and low volume of water (reduces niches where bacteria can develop).
Side temperature control with long lever control and adjustable maximum temperature limiter.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- Total hygiene: no manual contact
- 90% water savings
- Anti-bacterial proliferation duty flush
- Sleek design

TECHNICAL CHARACTERISTICS

BINOPTIC MIX electronic mixer - Ref.478MCHLH

Technology	Electronic
Debit	3 lpm
Conector	M3/8"
Supply	6V battery
Supply	6V batteries
Drop Height	110 mm
Spout Length	135 mm
Installation:	Deck-mounted

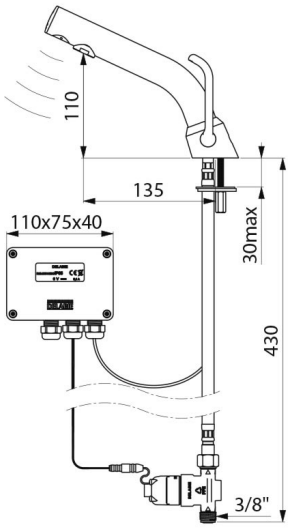

© Delabie