DELABIE

SECURITHERM shower panel



Ref. H9639

Sequential thermostatic mixer

DESCRIPTION

SECURITHERM shower panel - Ref.H9639

Anodised aluminium shower panel for wall-mounted exposed installation:
SECURITHERM sequential thermostatic mixer (non-time flow).
Adjustable temperature control from cold water up to 39°C; maximum temperature limiter set at 39°C, can be adjusted.
Anti-scalding failsafe: automatic shut-off if cold water supply fails.
Anti-cold showers function: automatic shut-off if hot water fails.
Thermal shocks are possible.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation at 6 lpm at 3 bar.
Hygiene control lever L. 100mm.
Top inlets with inline M1/2" stopcocks.
Concealed fixings.
Filters.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- Sequential: opens/closes with cold water
- No non-return valves on inlets
- SECURITHERM: optimal anti-scalding safety
- Thermostatic: total temperature stability

TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref.H9639

Technology	Sequential thermostatic SECURITHERM
Inaltime	1050 mm
Debit	6 lpm
Conector	M1/2"
Finisaj	Aluminium
Supply	Top inlets with M1/2" inline stopcocks
Temperature limiter	39 °C
Width	210 mm
Water supply	Concealed

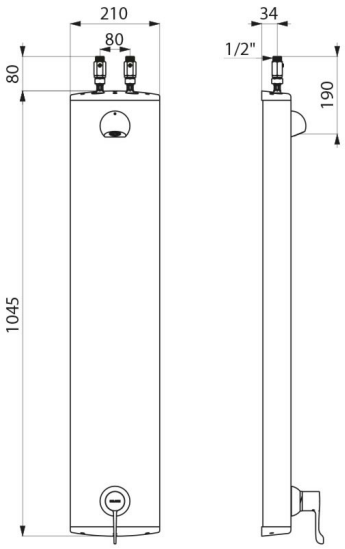

© Delabie