DELABIE

SECURITHERM shower panel



Ref. H963915

Sequential thermostatic mixer

DESCRIPTION

SECURITHERM shower panel - Ref.H963915

SECURITHERM anodised aluminium shower panel for wall-mounted exposed installation:
SECURITHERM sequential thermostatic mixer (non time flow).
Temperature control from cold water up to 39°C.
Maximum temperature limiter set at 39°C, can be adjusted.
Anti-scalding failsafe: automatic shut-off if cold or hot water supply fails.
Thermal shocks are possible.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation at 6 lpm at 3 bar.
Hygiene control lever L. 100mm.
Top inlets with M1/2" stopcocks.
With copper tails.
Concealed fixings and filters.
10-year warranty.


ADVANTAGES

- SECURITHERM: Optimum anti-scalding safety
- Maximum hygiene: no non-return valves
- Thermostatic: total temperature stability
- Sequential: open and closing on cold water

TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref.H963915

Technology	SECURITHERM single control thermostatic mixer
Inaltime	1050 mm
Debit	6 lpm
Conector	M1/2" Ø 15mm
Finisaj	Aluminium
Supply	Top inlets via inline stopcocks M1/2"
Temperature limiter	39 °C
Width	210 mm
Water supply	Concealed

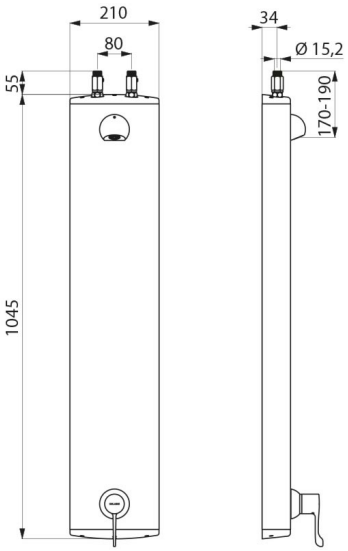

© Delabie