DELABIE

SECURITHERM shower panel

Ref. 792514

Electronic mains supply thermostatic



DESCRIPTION

SECURITHERM shower panel - Ref.792514

Electronic thermostatic shower panel:
Large stainless steel panel for wall-mounted, exposed installation.
Concealed inlet via flexibles M½".
SECURITHERM thermostatic mixer.
Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.
Anti-scalding failsafe: automatic shut-off if cold water fails.
Anti-cold showers function: automatic shut-off if hot water fails.
Thermal shocks are possible.
Mains supply 230/6V.
Shower starts when electronic push-button is pressed.
Shuts off voluntarily or automatically after ~60 seconds.
Duty flush (~60 seconds every 24 hours after the last use).
Flow rate 6 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.
Integrated soap dish.
Filters and non-return valves.
Stopcocks M½".
Concealed fixings.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- 80% water savings
- Anti-bacterial proliferation duty flush
- Thermostatic temperature regulation
- Instant shut-off if cold water fails

TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref.792514

Technology	Electronic
Inaltime	1220 mm
Debit	6 lpm
Conector	M1/2"
Finisaj	Stainless steel
Supply	230/6V mains supply
Temperature limiter	Thermostatic
Width	250 mm
Depth	100 mm
Water supply	Concealed

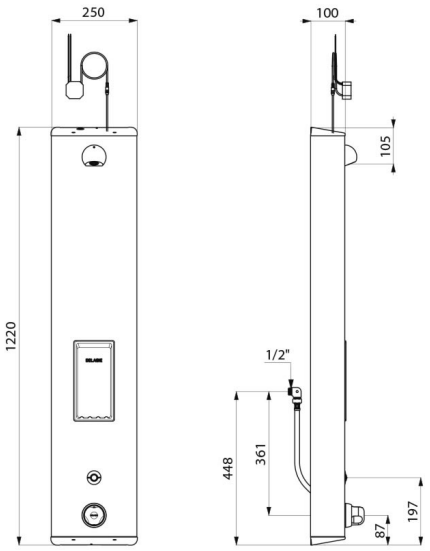

© Delabie