DELABIE

# SECURITHERM shower panel

Ref. 79240415

Electronic battery-operated thermostatic



## DESCRIPTION

**SECURITHERM shower panel - Ref.79240415**

Electronic thermostatic shower panel:
Large stainless steel panel for wall-mounted, exposed installation.
Top inlet via in-line stopcocks Ø15mm for compression fittings.
SECURITHERM thermostatic mixer.
Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.
Anti-scalding failsafe: automatic shut-off if cold water fails.
Anti-cold showers function: automatic shut-off if hot water fails.
Thermal shocks are possible.
Battery-operated with 223 6V Lithium battery.
Infrared presence detection. Shower starts when hand is 4cm from the sensor.
Shuts off on demand or automatically after ~60 seconds.
Duty flush (~60 seconds every 24 hours after the last use).
Flow rate set at 6 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.
With integrated soap dish.
Concealed fixings.
Filters and non-return valves.
Suitable for people with reduced mobility.
10-year warranty.


## ADVANTAGES

- Total hygiene: operate without manual contact
- Automatic duty flush limits proliferation of bacteria
- Thermostatic temperature regulation
- Instant shut-off if cold water fails

## TECHNICAL CHARACTERISTICS

**SECURITHERM shower panel - Ref.79240415**

| | |
|---|---|
| Technology | Electronic |
| Technology | Electronique |
| Inaltime | 1220 mm |
| Debit | 6 lpm |
| Conector | M1/2" Ø 15mm |
| Finisaj | Stainless steel |
| Supply | 6V battery |
| Temperature limiter | Thermostatic |
| Width | 250 mm |
| Depth | 100 mm |
| Water supply | In-line |

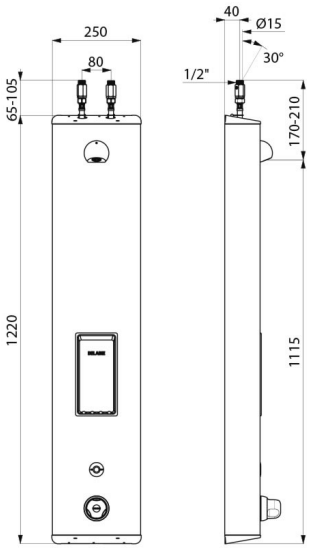


© Delabie