
DELABIE

PREMIX COMFORT

Ref. 731002

Group thermostatic mixing valve for mixed water 32°-42°C



DESCRIPTION

PREMIX COMFORT - Ref.731002


Group thermostatic mixing valve for mixed water distribution from 32° - 42°C:
Anti-scalding safety.
Regulates temperature variations.
Filters and non-return valves can be accessed from the outside without removing the mechanism.
Thermal shock with no specific lever needed (push-button on the control knob).
Interchangeable cartridge with automotive cell.
High-resistance chrome-plated brass body.
Maximum hot water temperature: 85°C.
Differential hot water / mixed water: 15°C minimum.
Pressure difference at the inlets: 1 bar maximum (0.5 bar recommended).
Minimum pressure / maximum: 1 - 10 bar (1 - 5 bar recommended).
Left hand side hot water inlet (red ring) and right hand side cold water inlet (blue ring).
Mixed water outlet at the top (purple ring).
For bottom outlet: unscrew / place lid at the top and outlet connector at the bottom.
Maximum temperature limiter, can be adjusted by the installer.
Reduced risk of scalding by limiting temperature at the point-of-use.
55 lpm - M¾".
10-year warranty.

ADVANTAGES

TECHNICAL CHARACTERISTICS

PREMIX COMFORT - Ref.731002

Technology	Thermostatic
Inaltime	60 mm
Lungime	120 mm
Debit	55 lpm
Conector	M3/4"
Depth	18 mm

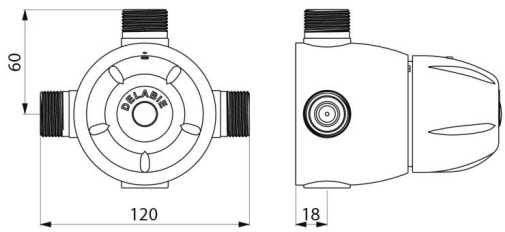

© Delabie