
DELABIE

# PREMIX COMFORT

Ref. 731400

Group thermostatic mixing valve, mixed water 32°-42°C



## DESCRIPTION

**PREMIX COMFORT - Ref.731400**

Group thermostatic mixing valve for mixed water distribution from 32° to 42°C:
Anti-scalding safety.
Regulation of temperature variations.
Non-return valves and filters accessible from the exterior without having to remove the mechanism.
Thermal cartridge with no specific lever needed (push-button on the control knob).
Interchangeable cartridge with automotive cell.
High-resistance chrome-plated brass body.
Maximum hot water temperature: 85°C.
Differential hot water / mixed water: 15°C mini.
Pressure differences at the entrance: 1 bar maximum (0.5 bar recommended).
Minimum pressure / maximum: 1 to 10 bar (1 to 5 bar recommended).
Left hand side hot water inlet (red ring) and right hand side cold water inlet (blue ring).
Mixed water outlet at the top (purple ring).
For bottom outlet: unscrew / place lid at the top and outlet connector at the bottom.
Maximum temperature limiter, can be adjusted by the installer.
Reduced risk of scalding by limiting temperature at the point-of-use.
140 lpm - M1¼".
10-year warranty.


## ADVANTAGES

- Automatic shut-off if cold water fails Temperature stability
- Accessible filters and non-return valves
- Automotive thermo-reactive cell

## TECHNICAL CHARACTERISTICS

**PREMIX COMFORT - Ref.731400**

| | |
|---|---|
| Technology | Thermostatic |
| Inaltime | 107 mm |
| Lungime | 180 mm |
| Debit | 140 lpm |
| Conector | M1"1/4 |
| Depth | 26 mm |

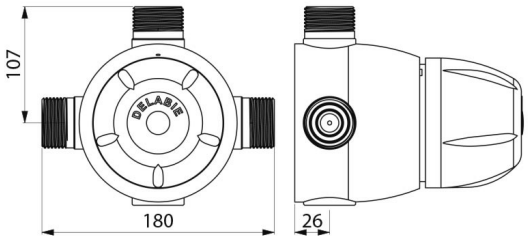


© Delabie