DELABIE

TEMPOFIX 3 wall-mounted frame system with time flow WC valve



Ref. 564060-763000

TEMPOFLUX 3 AB dual flush 3L/6L time flow valve

DESCRIPTION

TEMPOFIX 3 wall-mounted frame system with time flow WC valve -

Ref.564060-763000

Frame system for wall-hung WCs:
- Black powder-coated steel frame.
- Wall-mounted frame system for fixing to load-bearing walls.
- Frame height can be adjusted from 0 - 200mm (with 1m mark).
- Ø 32mm flush tube with Ø 55mm connection washer.
- Ø 100mm PVC soil pipe to glue onto the waterproof seal, with 2 setting positions.
- Delivered pre-mounted.
- Compatible with solid walls from 10 - 120mm.
- 10-year warranty.

Fitted with a TEMPOFLUX 3 F¾" time flow direct flush valve:
- Satin finish stainless steel wall plate 210 x 162mm and chrome-plated metal button.
- Waterproof recessing housing.
- Soft-touch operation.
- Dual flush 3L/6L, can be adjusted to 2L/4L.
- AB anti-blocking system.
- Backflow prevention device inside the housing.
- Integrated stopcock and flow rate adjuster.
- Acoustic level complies with European standard EN 12541 class II.
- Compatible with sea water and grey water.

Technical characteristics: see TEMPOFLUX 3 ref. 763BOX-763000.

Kit contents:
(564060): frame system, soil pipe Ø 100mm, flush tube, recessed housing with cover, valve for system flush, vacuum breaker, stopcock, connection accessories.
(763000): control plate, collar for waterproofing, time flow cartridge.

ADVANTAGES

- Quick and easy to install: delivered pre-mounted
- Install behind wall, on frame system
- Dual flush 3L/6L, anti-blocking system
- Direct flush: no stagnant water


© Delabie

TECHNICAL CHARACTERISTICS

TEMPOFIX 3 wall-mounted frame system with time flow WC valve -

Ref.564060-763000

Technology	Time flow
Inaltime	1000 - 1320 mm
Conector	3/4"
Finisaj	Satin finish stainless steel
Width	350 mm
Depth	157 - 177 mm

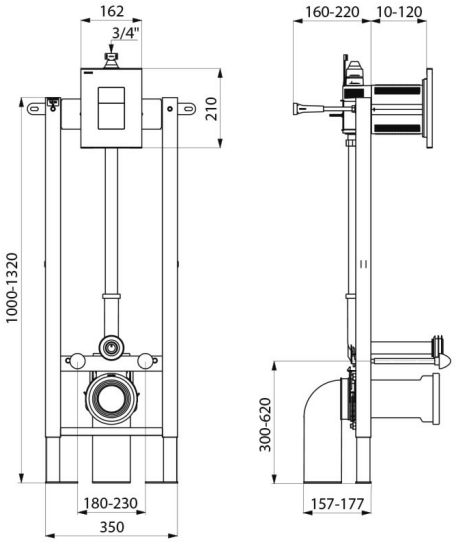

© Delabie